Security Aspects

Advanced Operating Systems and Virtualization Alessandro Pellegrini A.Y. 2019/2020

Basic Security Aspects

- 1. Systems must be usable by legitimate users only
- 2. Access is granted on the basis of an authorization, and according to the rules that are established by some system administrator
 - As for point 1, an unusable system is useless
 - However, in several scenarios the attacker might only tailor system non-usability by legitimate users (so called DOS – Denial of Service attacks)





Baseline Security Approaches

- Cryptography
- Authentication / Capabilities
- Security enhanced operating systems

- Each approach targets specific security aspects
- They should be combined together to improve the overall security of the system





Security Aspects Already Mentioned

- Address randomization
- Kernel-level stack protection
- Userspace Namespaces
- Sigreturn Oriented Programming
- Read only permission to critical data/code even when running in kernel mode
- Determination of the presence of critical instructions (e.g. those updating CR0 in x86 machines) upon module insertions (as in Linux)
- Minimization of the exposition of kernel layout data (%pK and /proc/kallsyms)





User Authentication

- Users login via passwords
- The passwords' database is stored within two distinct files:
 - /etc/passwd
 - /etc/shadow
- /etc/passwd is accessible to every user
- /etc/shadow is accessible only by root





/etc/passwd

- /etc/passwd has the following format:
 - username:passwd:UID:GID:full_name:directory:she
 11

username:Npge08pfz4wuk:503:100:The
 User:/home/username:/bin/sh

- Np represents the salt (16 bit) and ge08pfz4wuk is the encrypted password
- When using shadowing, /etc/passwd has the format: username:x:503:100:full_name:/home/username:/bin/s h
- x is a placeholder, hence /etc/passwd no longer contains passwords





/etc/shadow

- /etc/shadow has the format: username:passwd:ult:can:must:note:exp:disab:reserved
- where:
 - 1. username is the user
 - 2. passwd is the encrypted password
 - 3. ult are the days from 1/1/1970 since the last password change
 - 4. can day interval after which it is possible to change the password
 - 5. must day interval after which the password must be changed
 - 6. Note day interval after which the user is prompted for password update
 - 7 . exp days after which the account is disabled if password expires
 - 8. disab days from 1/1/1970 after which the account will be disabled
 - 9. reserved no usage a reserved field





User IDs in Unix

- The username is only a placeholder
- What discriminates which user is running a program is the UID
- The same is for GID
- Any process is at any time instant associated with three different UIDs/GIDs:
 - Real: this tells who you are
 - Effective: this tells what you can actually do
 - Saved: this tells who you can become again





UID/GID management system calls

- setuid()/seteuid(): available only to UID/EUID equal to 0 (root)
- getuid()/geteuid(): queries available to all users
- Similar services exist for managing GID
- setuid() is "non reversible" in the value of the saved UID: it
 overwrites all the three used IDs
- seteuid() is reversible and does not prevent restoring a saved UID
- An EUID-root user can temporarily become a different EUID user and then resume EUID-root identity
- UID and EUID values are not forced to correspond to those registered in /etc/passwd





su and sudo

- Both these commands are setuid-root
- They enable starting with the EUID-root identity
- If a correct input password is given by the user, they move the real UID to root or the target user (in case of su)
- After moving the UID to root, sudo executes the target command





Address-based Service Enabling

- Based on the concept of Access Control List (ACL)
- Addresses of enabled users are explicitly specified
- It is useful for services exposed on a network
- An approach used in architectures such as:
 - super-servers (e.g. inetd: the internet daemon, xinetd: the extended internet demon)
 - TCP containers (e.g. tcpd)
- Also used since ext3 File System
 - setfacl and getfacl commands





UNIX inetd

- It controls services running on specific port numbers
- Upon connection or request arrival, it starts the actual target service and redirects sockets to stdout, stdin, stderr
- Association between port number and actual service has been based on the file /etc/services, with format:
 - •
 - ftp-data 20/tcp
 - ftp 21/tcp
 - telnet 23/tcp
 - •
- The **inetd** daemon was initially conceived as a means for resource usage optimization
- It has been then extended to cope with security





inetd Configuration

- Configuration information for inetd is typically kept by /etc/inetd.conf
- Each managed service is associated with one line structure as
 - Service name, as expressed in /etc/services
 - Socket type (e.g. stream)
 - Socket protocol (e.g. TCP)
 - Service flag (wait/nowait) which determines the execution mode (concurrent or not)
 - The user id to be associated with the running service instance (e.g. root)
 - The executable file path (e.g. /usr/sbin/telnetd) and its arguments (if any)





xinetd Features

- It provides an extension of **inetd** relying on
 - Address based access control
 - Time frame based access control
 - Full log of run-time events
 - DOS prevention by putting limitation on
 - Maximum number of per-service instances
 - Maximum number of total server instances
 - Log file size
 - Per machine source-connections
- Its configuration file is /etc/xinetd.conf
- It can be generated relying on the PERL utility xconv.pl





TCP daemons: tcpd

- The tcpd daemon wraps the services managed via inetd, so as to support access control rules
- **tcpd** is the actual server that is activated upon a request accepted by **inetd**
- **tcpd** receives as input the service specification
- Service management takes place by relying on rules coded in /etc/hosts.deny and /etc/hosts.allow
- Here we can find the specification of allowed or denied sources for a given service
- Each line is structured as daemon_list : client_list
- ALL is used to identify the whole set of managed services and all the hosts
- An example (access to all **inetd** services allowed from the local host)
 - # /etc/hosts.allow
 - ALL: 127.0.0.1






Reverse DNS tampering

- Usually host/domain specification occurs via symbolic names, rather than IP addresses
- Upon receiving a request/connection, **tcpd** checks with the source IP and executes a *reverse DNS* (rDNS) query to get the symbolic name of the source host
- An attacker can tamper with the reverse DNS query so as to reply with an allowed host/domain name
- To cope with this attack, **tcpd** typically performs both forwards DNS and reverse DNS queries so as to determine whether there is matching





An example scheme

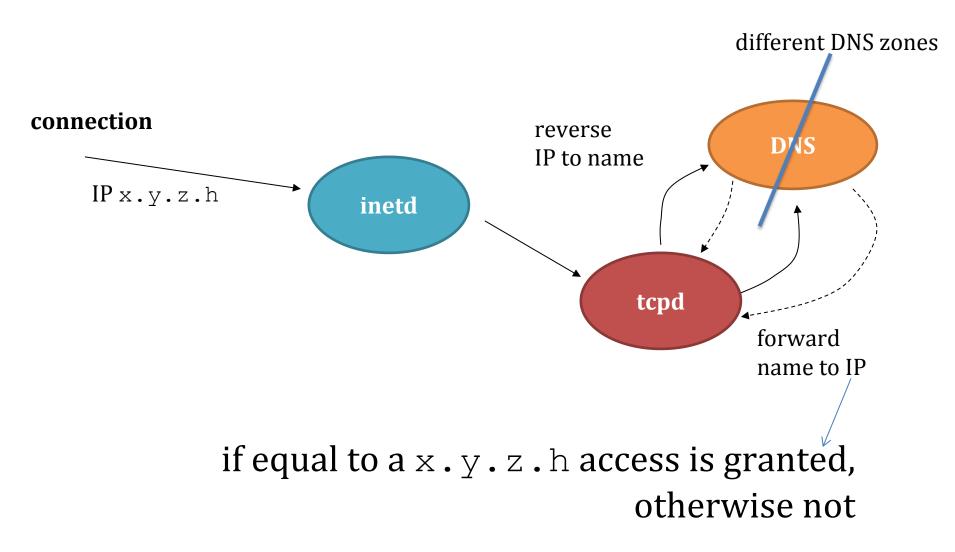






DNS Zones

- DNS is defined in zones
- The owner of a zone maps different addresses to different domain names in their zone
- writing www.example.com accesses the example.com zone, and associates via an A (alias) record the hostname www to a certain IP
- rDNS is based on the PTR record
- a PTR record is stored in a special zone called .in-addr.arpa. This zone is adminstrated by whoever owns the block of IP addresses.







Secure Operating Systems

- A secure operating system is different from a conventional one because of the different granularity according to which we can specify resource access rules
- In this way, an attacker has lower possibility to make damages (e.g. in term of data access/manipulation) with respect to a conventional system
- Secure operating systems examples are:
 - SELinux (by NSA)
 - SecurLinux (by HP)
- Secure operating systems rely on the *Mandatory Access Control*






Security policies

- A security policy is named **discretionary** if ordinary users (including the administrator) are involved in the definition of security attributed (e.g. protection domains)
- A security policy is named mandatory if its logics and the actual definition of security attributes is demanded to a security policies' administrator (who is not an actual user/root of the system)





Boot Time Attacks

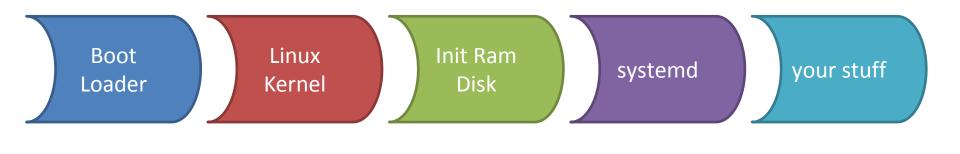







Horse Pills

- A boot-time attack which is based on init scripts loaded into a ramdisk and the usage of namespaces
- An infected ramdisk can easily take control of the machine







Horse Pills

- What an infected ramdisk could do:
 - load modules
 - cryptsetup
 - find and mount rootfs
 - enumerate kernel threads
 - clone (CLONE_NEWPID, CLONE_NEWNS)
 - remount root
 - mount scratch space
 - fork()
 - hook initrd updates
 - backdoor shell
 - waitpid()
 - shutdown/reboot

- remount /proc
- make fake kernel threads
- clean up initrd
- exec init



Userspace System Internal Attacks


- An attack is said to be *internal* if it exploits an application that is installed and/or active in the system
- The attacker can either be an external user or one registered as a legitimate system user
- The classical internal attacks are:
 - Trojan horses
 - Login spoofing (ctrl+alt+del)
 - Logical bombs
 - Backdoors
 - Buffer overflows





Buffer overflow protection methods

- Stack randomization (upon exec() calls)
- Canary random tags as cross checks in the stack before returning

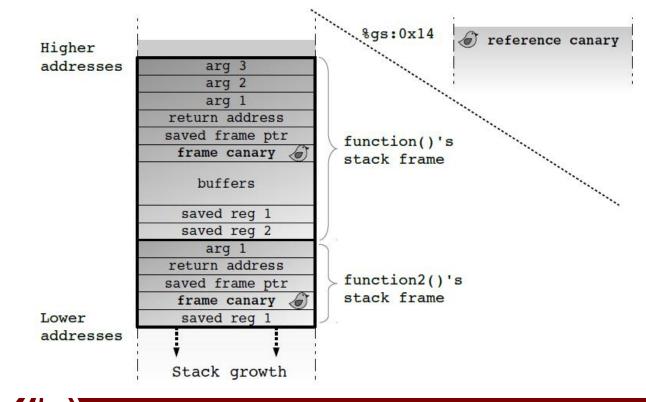



Non-Executable Address Space Regions

- x86_64 architectures provide page/region protection against instruction fetch
- The XD flag in the entries of the page tables
- This support was not available on i386 machines
- This is one reason why the PROT_READ/PROT_EXEC flags of mmap() are sometimes collapsed into the same protection semantic
- To enable instruction fetch from the stack on x86_64 you can use the "-z execstack" option of gcc





Exploit-based DOS: Ping of Death

- This attack appeared in 1996, and is based on an inconsistency within the IP protocol in common kernels
- IPv4 forbids a packet to be larger than 64 Kb
- IP allows for packet fragmentation, with reconstruction at the destination
- However, the offset of a fragment has been based on 16 bits within the header, so that we might specify a fragment that stands beyond the maximum packet bound
- In this case the operating system kernel writes the fragment out of the boundaries of the actual buffer selected for the receipt





Intrusion Detection Systems (IDS)

- Security can be improved, not definitely guaranteed
- We need systems able to detect that something wrong is going on
- This allows for:
 - Designing countermeasures for new attacks
 - Protect resources in case of an ongoing attack
- Intrusion detection systems (IDS) rely on two classical paradigms:
 - Anomaly Detection
 - Misuse Detection





Anomaly Detection

- This paradigm relies on the assumption that attacks are anomalous (infrequent), hence any anomalous event is assumed to represent an attack
- It is based on defining what are the admissible (normal) events, and in identifying any other event as an attack
- Events that are normal (but not identified as normal ones) can be identified as attacks (*false positives*)
- False positives can trigger countermeasures (e.g. system halt) that might not be actually required
- We might also experience *false negatives* in case an attack only relies on a sequence of admissible (normal) events





Misuse Detection

- It is based on a-priori identification of attack events which are registered into the IDS
- A true attack cannot be identified as such in case it is not coded in the a priori knowledge base, hence we can experience false negatives





Classical IDS types

- Honeypots
- File integrity checkers
 - Useful for libraries and modules
 - They can fail if the system is subverted
- Log checkers
 - Typically do not work in real time
- Network intrusion detection systems





Intrusion Prevention System: the Reference Monitor

